




ATF TOP UP

Automatic Transmission & Power Steering Fluid

Issue: June 2015

Product Code	Pack Size	Ctn / Qty
ATFTU001	1 Litre	6

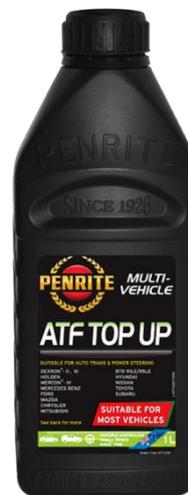

Product Description

ATF Top Up is a special purpose, heavier viscosity, transmission fluid designed for topping up **Automatic Transmissions** and **Power Steering** systems that require Dexron type II & III fluids. ATF Top up meets the basic frictional and anti-wear requirements of DEXRON®-IIE.

Application

ATF Top Up is designed for the top up of most car & truck automatic transmissions to 20% maximum, that require conventional transmission fluids. It is particularly suited to transmission types that use fluids that are Dexron II/III compatible such as older Ford, Holden, Mazda, Mercedes, Mitsubishi, Nissan & Toyota. It can also be used in some Allison automatic transmissions in heavy vehicles that specify Dexron II & III type fluids.

ATF Top Up can also be used to top up most power steering systems that specify automatic transmission fluid.

ATF Top Up is **NOT RECOMMENDED** for use as a top up for the following products or their equivalents – ATF DX-VI CVT Fluid V Honda/Audi/ Subaru CVT Fluids VW DCT/DSG Fluids

ATF Top Up is suitable for use in passenger cars, 4WD's, light & heavy commercial vehicles that specify Dexron II & III type transmission fluids.

Product Benefits

- Minimises wear and maximises equipment life.
- Long life performance.
- Suitable to top up most automatic transmissions and power steering systems
- Compatible with Dexron II & III type products
- Shear stable formulation provides consistent shift quality.
- Compatible with a wide range of seal materials.
- Low deposit formation due to use of outstanding oxidation inhibitors

Industry Specifications

DEXRON®-IID/IIE

ZF TE-ML11

Voith Diwa

Mazda M-III

Toyota T11

MERCON®-IV

Ford ESR-M2C-163A

Denison T5D, P-46, HF-2

Chrysler ATF+3

BTR 91LE/95LE

Allison C-4

Ford M2C-166H

Vickers 35VQ25

Mitsubishi SP-2

MB 236.1

Ford M2C-138CJ

Sundstrand 22-213L

Nissanmatic C/D

Typical Data

Colour

Dark Red

Density at 15°C, kg/L

0.870

Viscosity, Kinematic, cSt

at 40°C

52

at 100°C

8.2

Viscosity Index

127

Phosphorus, mass %

0.016

Boron, mass %

Trace

Information in this sheet is based on recent production. Minor variations to typical properties are expected in normal manufacture and do not affect product performance. An MSDS is available on request.



PENRITE OIL COMPANY PTY LTD, 88 Lewis Road, Wantirna South
 Victoria AUSTRALIA 3152, ABN 25 005 001 525
 Enquiries: Phone 1300-PENRITE (1300 736 748)
 Fax: 1800-PENRITE (1800 736 748)
 International: Phone: 61 3 9801 0877, Fax: 61 3 9801 0977
 New Zealand Ph: 0800 533 698, Fax: 0508 736 748
 United Kingdom and EU Ph: +44 (0) 1594 562357, Fax: +44 (0) 1594 564234
 Website: www.penriteoil.com, Email: penrite@penriteoil.com

**PROUDLY AUSTRALIAN
 FAMILY OWNED
 SINCE 1926**

