



# PRO 15 PLUS

## Semi Synthetic 15W-50 Engine Oil

Issue: November 2016

Product Code	Pack Size	Ctn / Qty
PRO15PLUS020	20 Litre	1
PRO15PLUS060	60 Litre	1
PRO15PLUS205	205 Litre	1

### Description

**Pro 15 Plus** is a premium grade, semi synthetic SAE 15W-50 engine oil developed for use in modern petrol, LPG and light duty diesel (Non DPF) engines exclusively in professional workshops and vehicle service centres. It uses a combination of the latest additive technology and a low shear rate viscosity modifier, to ensure additional protection against wear, corrosion, oil oxidation, piston deposits and sludge under tough conditions.

**Pro 15 Plus** exceeds the latest European ACEA A3/B4 and API SN/CF requirements, as well as many manufacturers' specifications.

### Application

**Pro 15 Plus** is designed for use in modern 4, 6 & 8+ cylinder multi-cam, multi-valve (including VVT), naturally aspirated, supercharged & turbocharged engines.

**Pro 15 Plus** is recommended where the manufacturer specifies a SAE 15W-40, 15W-50, 20W-40 or 20W-50 engine oil.

**Pro 15 Plus** can be used where ACEA A3/B4 is recommended and can also be used where previous API specifications SM (2004-10), SL (2001-04), & SJ are recommended.

**Pro 15 Plus** may be used with LPG and some diesel engine passenger cars, 4WDs and light commercials. It is not suitable for use in diesel vehicles fitted with a diesel particulate filter that require a low "SAPS" engine oil.

### Product Benefits

- **LATEST** oil specification technology exceeding **API SN** and **ACEA A3/B4**
- **FULL ZINC** anti-wear additive package for ultimate engine wear protection
- Reduces oil consumption and maintains oil pressure
- Catalytic converter compatible.
- Ideal for light duty diesel engines
- Minimises sludge formation
- Maximises wear protection
- Reduces piston deposits


### Industry Specifications

API SN/CF                      ACEA A3/B4                      VW 501 01

### Typical Data

SAE Grade	15W-50
Density at 15°C, kg/L	0.873
Viscosity, Kinematic, cSt	
at 40°C	149
at 100°C	19.2
Viscosity Index	149
Viscosity, Cold Cranking @ -20 °C	5,819
Zinc, mass %	0.110
Sulphated Ash, mass %	1.08
Base Number	8.2

Information in this sheet is based on recent production. Minor variations to typical properties are expected in normal manufacture and do not affect product performance. An MSDS is available on request.

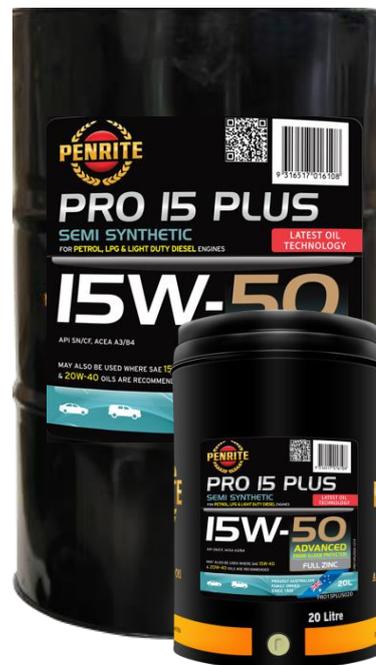

# PENRITE



**PENRITE OIL COMPANY PTY LTD**, 88 Lewis Road, Wantirna South  
 Victoria AUSTRALIA 3152, ABN 25 005 001 525  
 Enquiries: Phone 1300-PENRITE (1300 736 748)  
 Fax: 1800-PENRITE (1800 736 748)  
 International: Phone: 61 3 9801 0877, Fax: 61 3 9801 0977  
 New Zealand Ph: 0800 533 698, Fax: 0508 736 748

**PROUDLY AUSTRALIAN  
 FAMILY OWNED  
 SINCE 1926**



**United Kingdom and EU** Ph: +44 (0) 1594 562357, Fax: +44 (0) 1594 564234  
 Website: [www.penriteoil.com](http://www.penriteoil.com), Email: [penrite@penriteoil.com](mailto:penrite@penriteoil.com)